


MODIFICHE (REVISIONS)			
ZONE	REV	DESCRIPTION	DATE
	7	From year 2010 to July 2016	10/03/2011
sheet 1 of 3 C4-CS-05	8	Changed lengths: T2-T20 from 550mm to 300mm, T20-H from 100mm to 350mm, T20-I from 210mm to 460mm.	12/07/2016

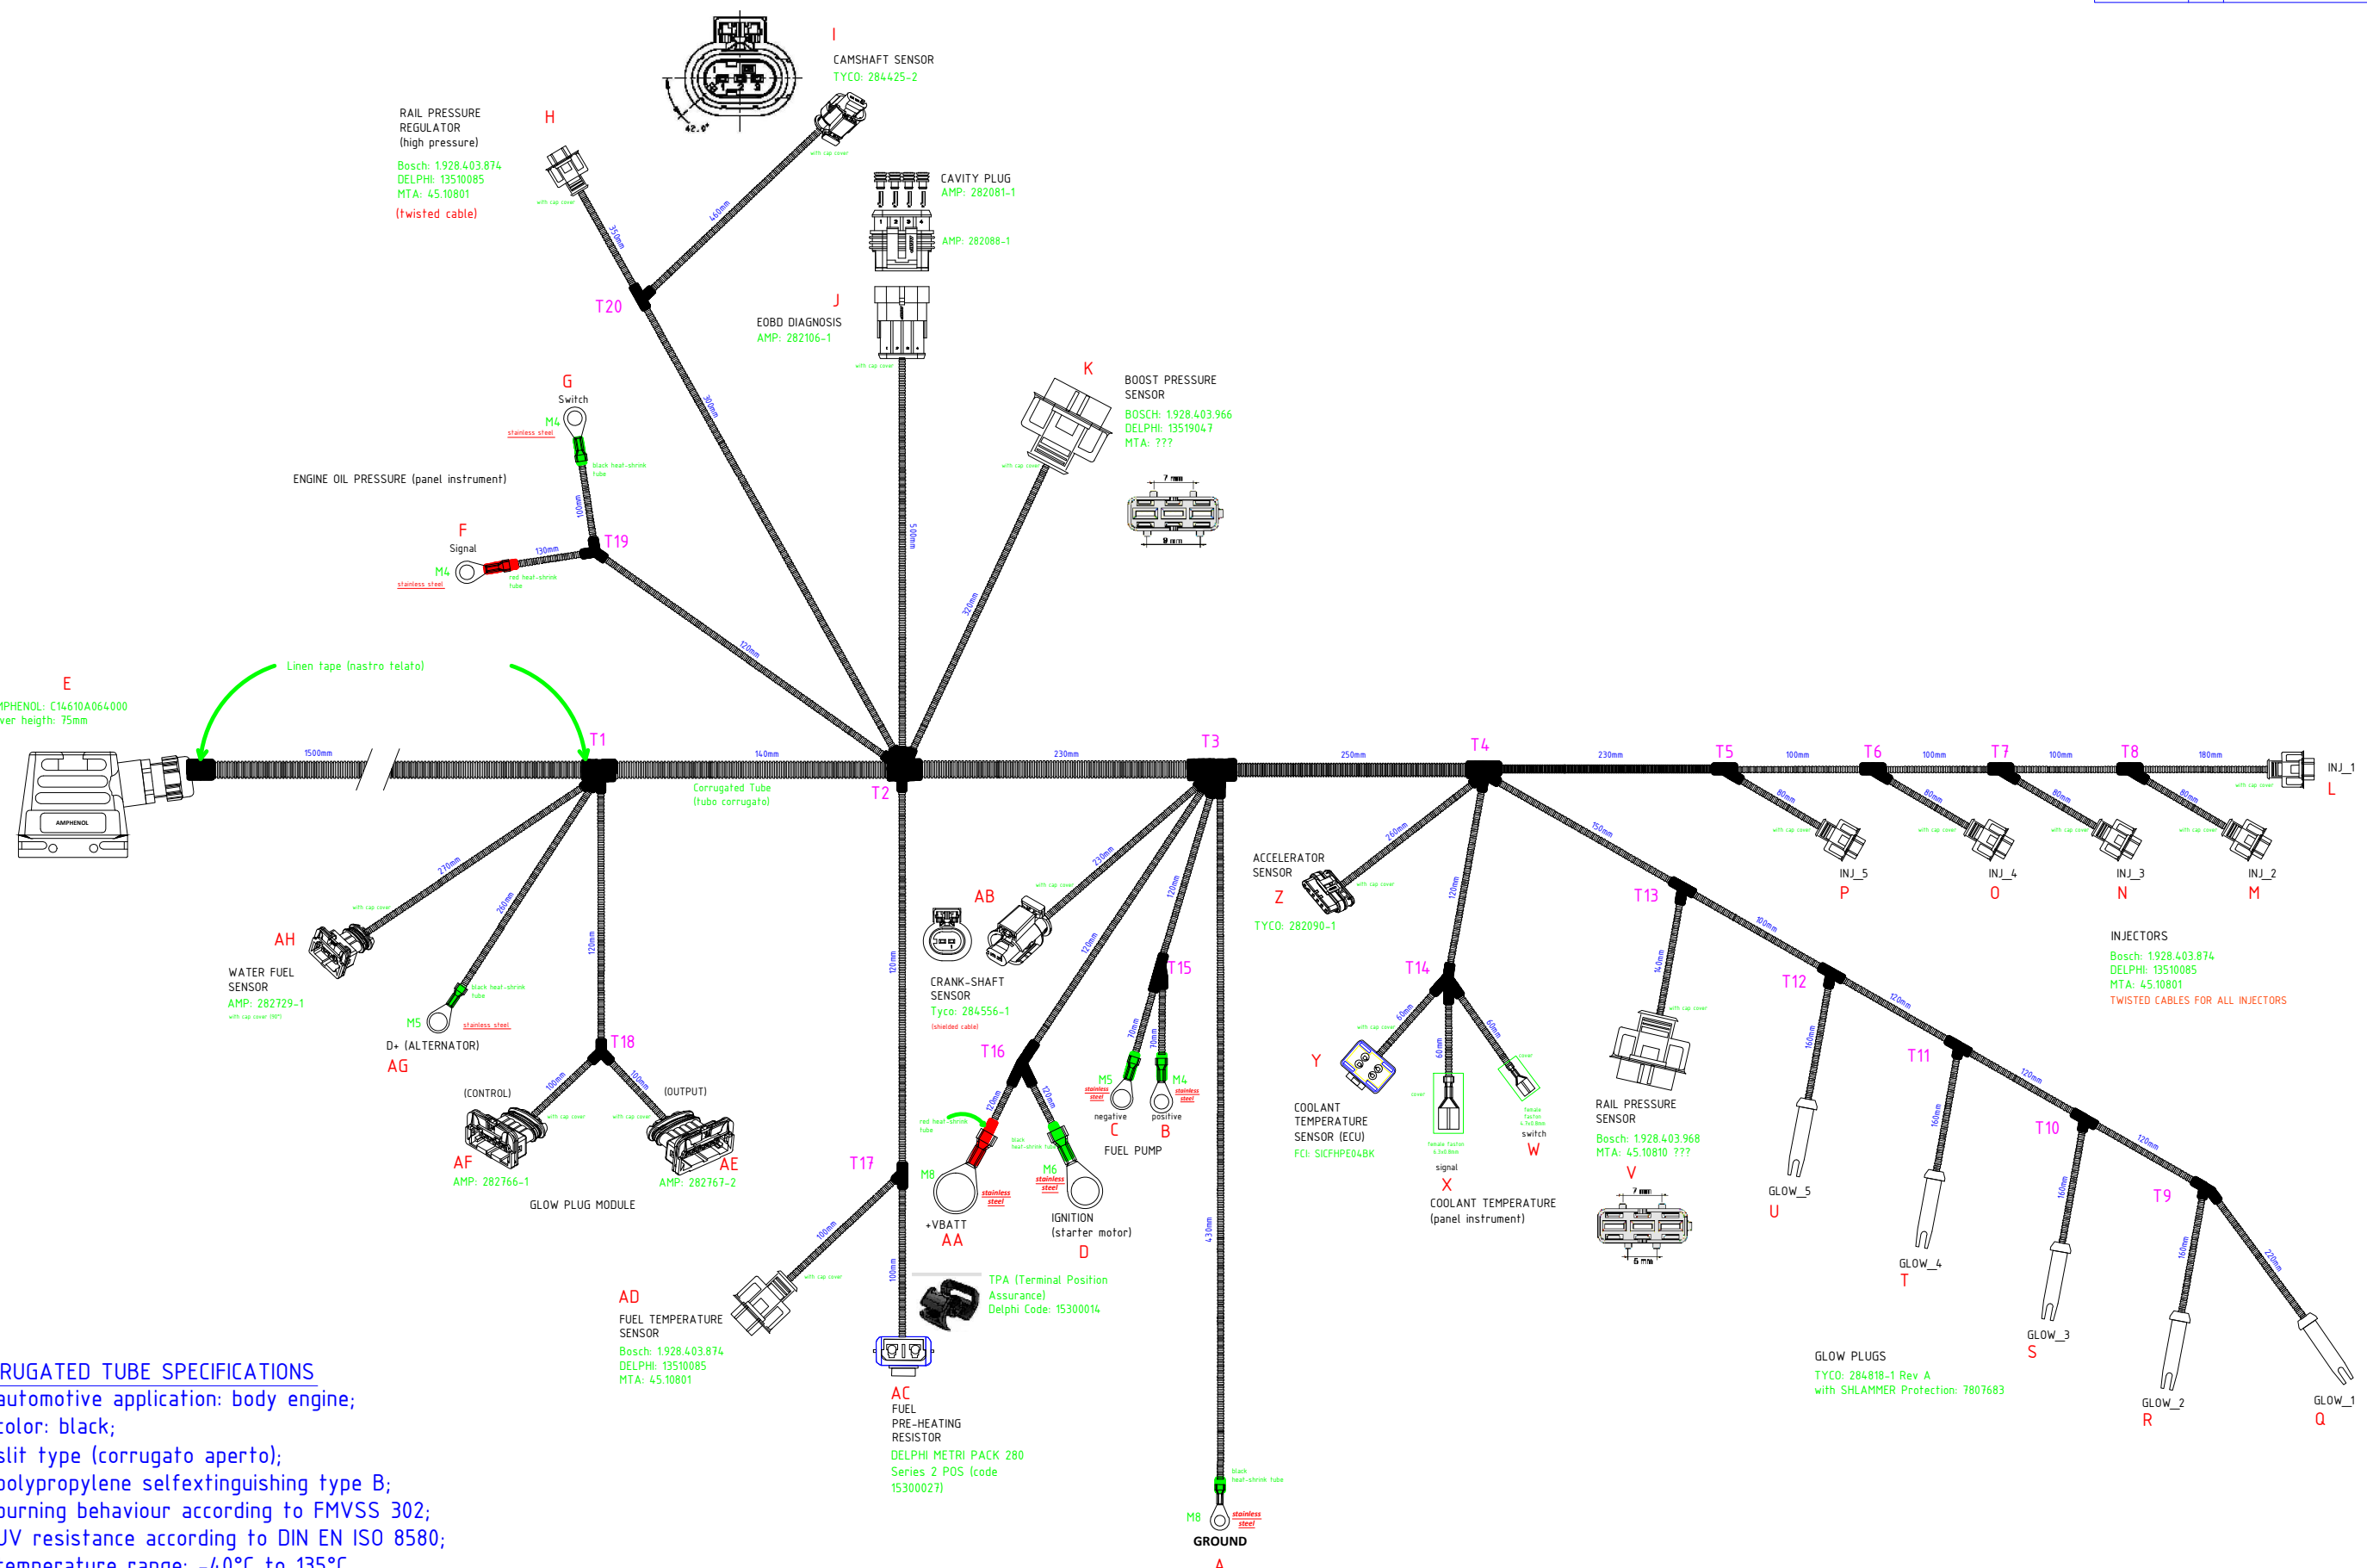

- CORRUGATED TUBE SPECIFICATIONS**
1. automotive application: body engine;
  2. color: black;
  3. slit type (corrugato aperto);
  4. polypropylene selfextinguishing type B;
  5. burning behaviour according to FMVSS 302;
  6. UV resistance according to DIN EN ISO 8580;
  7. temperature range: -40°C to 135°C.
- CABLE SPECIFICATIONS**
1. automotive application;
  2. thermal class: T3.
- LENGHT SPECIFICATIONS**
- All lengths have an accuracy of +10-0mm.

	FILE NAME: 1.010.050.1 - Engine Wiring 2.4 JTD 20V - Rev8	NOTE: BOOST PRESSURE SENSOR 3 PIN
	PROJECT: HPEZ25/HPE250 - 2.4 JTD 20V	SCALE: not
DESIGNED: G. CUOMO	CHD CODE: 1.010.050.1	SHEET: 1/3
CHECKED: G. CUOMO	SPECIFICATIONS: Unless otherwise specified the dimensions are in mm Tolerances: +10mm-0mm	SIZE: A1
DRAWN: S. LA MANNA	<b>WIRING LAYOUT</b> PROPRIETARY NOTICE:	